

INSTRUCTION MANUAL

Spray Gun WIDER2

Important

This manual contains **IMPORTANT WARNINGS** and **INSTRUCTIONS**. Equipment in this manual is exclusively for painting purposes. Do not use for other purposes. The operator shall be fully conversant with the requirements stated in this instruction manual including important warnings, cautions and operation and correct handling. Read and understand the instruction manual, before use and retain for reference.

Be sure to observe warnings and cautions in this instruction manual. If not, it can cause paint ejection and serious bodily injury by drawing organic solvent. Be sure to observe following marked items which are especially important.	
WARNING	Indicates a potentially hazardous situation which, if not avoided, may result in serious injury or loss of life.
CAUTION	Indicates a potentially hazardous situation which, if not avoided, may result in minor or moderate injury or property damage.
Important	Indicates notes which we ask you to observe. The safety precautions in this instruction manual are the minimum necessary conditions. Follow national and local regulations regarding fire prevention, electricity and safety as well as your own company regulations.

Abbreviate Marking on the Spray Gun:											
This ANEST IWATA spray gun complies with 2014/34/EU Directive relating to equipment and protective systems intended for use in explosive potentially atmospheres.		II	2	G	Ex h	IIB	T6	Gb	X	T ^{Amb}	+5°C ~40°C
	Complies with European Directive	Specific Marking for Explosion Protective	Group II (Surface)	Category (Zone 1&2)	Type of Atmosphere (GAS)	Ignition Protection (not applied)	Explosion Group (Ethylene)	Temperature Class (≤85°C)	Explosion Protection level (EPL)	Additional conditions: Any static Electricity should be discharged and needs to be diverted to the ground via a conductive air hose not included.	Ambient Temperature

Important specifications

Max. Pressure	0.70MPa / 7.0bar / 100psi
Noise level	80dB(A)
Spray condition	Recommended
Measuring point	1m backwards from spray gun, 1.6m height
Max. temperature	Atmosphere: 5°C ~40°C (41°F~104°F) ; Air and Fluid: 5°C ~43°C (41°F~109°F)

Fluid nozzle – Fluid needle assy combination

Fluid nozzle		Fluid needle assy
Orifice Φ mm (in)	Mark	Mark
Φ 1.2 (0.047)	/W2 / 12	12H WIDER2
Φ 1.5 (0.059)	/W2 / 15	15 WIDER2
Φ 1.8 (0.071)	/W2 / 18	18 WIDER2
Φ 2.0 (0.079)	/W2 / 20	20 WIDER2
Φ 2.5 (0.098)	/W2 / 25	25 WIDER2
Φ 0.8 (0.031)	/W2-2/08	12 WIDER2
Φ 1.0 (0.039)	/W2-2/10	
Φ 1.2 (0.047)	/W2-2/12	

Important

Never connect pressure feeding paint except pressure feed type spray gun.

Main specifications


Model	Type of feed	Nozzle orifice Φ mm (in)	Air cap assy Mark	Recommended condition		Air consumption l/min (cfm)	Pattern width mm (in)	Air & fluid connection	Mass g (lbs.)	
				*1 Atomizing air pressure MPa (bar / PSI)	Fluid output ml/min					
WIDER2-12G2P	Pressure	1.2 (0.047)	G2P	0.29 (3.0 / 43)	500	500 (17.7)	400 (15.7)	Air G1/4 (NPS1/4)	375 (0.83)	
WIDER2-15K1S	Suction	1.5 (0.059)	K1		240	200 (7.1)	210 (8.3)			
-15K2S		K2	290		330 (11.7)	290 (11.4)				
-18K2S		2.0 (0.079)	R1		350	260 (9.2)	260 (10.2)			
-20R1S		R2	440		360 (12.7)	290 (11.4)				
-20R2S		W1	510		360 (12.7)	280 (11.0)				
-25W1S		2.5 (0.098)	W1		360 (12.7)	280 (11.0)				
WIDER2-15K1G	Gravity	1.5 (0.059)	K1		270	200 (7.1)	220 (8.7)			Fluid G3/8 (NPS3/8)
-15K2G		K2	290		330 (11.7)	320 (12.6)				
-18K2G		2.0 (0.079)	R1		410	260 (9.2)	340 (13.4)			
-20R1G		R2	510	360 (12.7)	280 (11.0)					
-20R2G		W1	510	360 (12.7)	320 (12.6)					
WIDER2-2-08G2P	Pressure	0.8 (0.031)	2-G2	0.16 (1.6 / 23)	200	340 (12.0)	360 (14.1)			
-10G2P		1.0 (0.039)			250	360 (14.1)				
-12G2P		1.2 (0.047)			300	380 (14.9)				

*1. Atomizing air pressure means air pressure at spray gun inlet when trigger is pulled and air flows.

Parts list

No.	Description	Qty
1	Air cap assy	1
2	Fluid nozzle - Fluid needle assy	1
	• Fluid nozzle	
	• Fluid needle assy	
3	Needle packing set	1
4	Pattern Adj. assy	1
5	Air valve seat assy	1
6	Air valve	1
7	Air valve spring	1
8	Fluid Adj. guide assy	1

No.	Description	Qty
9	Fluid needle spring assy	1
10	Fluid Adj. knob	1
11	Air valve shaft	1
12	Air Adj. assy	1
13	Trigger assy	1
14	Trigger stud assy	1
15	Brush	1

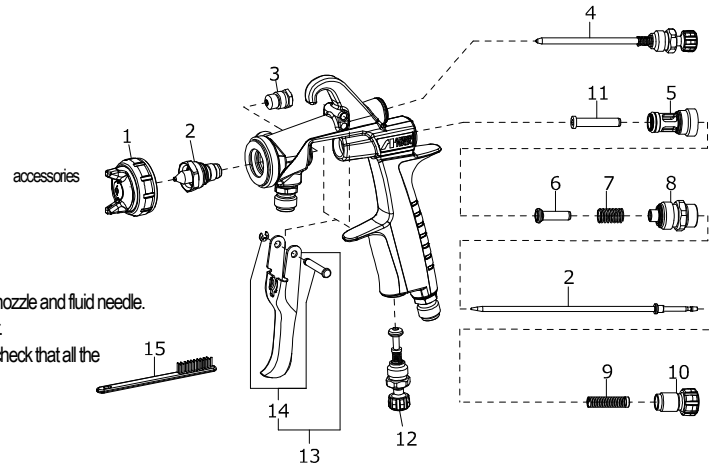

◆ Marked parts are wearable parts.

⊙ When ordering parts, specify spray gun's model, part name with ref. No. and marked No. of air cap assy, fluid nozzle and fluid needle.

⊙ When replacing fluid nozzle or/and fluid needle, please replace both fluid nozzle and fluid needle assy together.

⊙ When receiving the spray gun, make sure that it has not been damaged during transport or storage and also check that all the above contents are inside the box.

Safety precautions

⚠ WARNING

Fire and explosion

1. **Spark and open flames are strictly prohibited.**

Paints can be highly flammable and can cause fire.
Avoid any ignition sources such as smoking, open flames, electrical goods, etc.



2. **Never use the following HALOGENATED HYDROCARBON SOLVENTS**

which can cause cracks or dissolution on spray gun body (aluminum) by chemical reaction.
unsuitable solvents : methyl chloride, dichloromethane, 1,2-dichloroethane, carbon tetrachloride, trichloroethylene, 1,1,1-trichloroethane
(Be sure that all fluids and solvents are compatible with spray gun parts. We are ready to supply a material list used in the product)



3. **Securely ground spray gun by using air hose with built-in ground wire.**

Ground wire: Less than 1MΩ. Check the earth stability periodically.
If not, insufficient grounding can cause fire and explosion due to static electric sparking.

Improper use of equipment

1. **Never point spray gun toward people or animal.**

If done, it can cause inflammation of eyes and skin or bodily injury.

2. **Never exceed maximum operating pressure and maximum operating Temperature.**

3. **Be sure to release air and fluid pressures before cleaning, disassembling or servicing.**

If not, remaining pressure can cause bodily injury due to improper operation or scattering cleaning liquid.
In order to release pressure, first stop supply of compressed air, fluid and thinner to spray gun.
Then remove trigger toward you.



4. **Tip of fluid needle assy and tip of fluid nozzle has a sharp point.**

Do not touch the tip of fluid needle and the tip of fluid nozzle during maintenance for the protection of the human body.

Protection of human body

1. **Use in a well-ventilated site by using spray booth.**

If not, poor ventilation can cause organic solvent poisoning and catch fire.

2. **Always wear protective gear (safety glasses, mask, gloves).**

If not, cleaning liquid, etc., can cause inflammation of eyes and skin.
If you feel something wrong with eyes or skin, immediately see a doctor.

3. **Wear earplugs if necessary.**

Noise level can exceed 80dB(A), depending on operating conditions and painting site

4. **If operators pull the trigger many times during operation, it may cause carpal tunnel syndrome.**

Be sure to take a rest if you feel tired.



Other precautions

1. **Never alter this spray gun.**

If done, it can cause insufficient performance and failure.

2. **Enter working areas of other equipment (robots, reciprocators, etc.) after machines are turned off.**

If not, contact with them can cause injury.

3. **Never spray foods or chemicals through this spray gun.**

If done, it can cause accident by corrosion of fluid passages or adversely affect health by mixed foreign matter.


4. **If something goes wrong, immediately stop operation and find the cause. Do not use again until you have solved the problem.**

How to connect

CAUTION

- Use clean air filtered through air dryer and air filter. ---- If not, dirty air can cause painting failure.
- If you use this spray gun for the first time after purchasing, clean fluid passages spraying thinner and remove rust preventive oil. If not, remaining rust preventive oil can cause painting failure such as fish eyes.
- Firmly fix hose or container to spray gun. ---- If not, disconnection of hose and drop of container can cause bodily injury.

- Job1. Connect an air hose to air nipple tightly.
- Job2. Connect a fluid hose or a container to fluid nipple tightly.
- Job3. Flush the spray gun fluid passage with a compatible solvent.
- Job4. Pour paint into container, test spray and adjust fluid output as well as pattern width.



Maintenance and inspection

WARNING

- First release air and pressure fully according to item No. 3 of "Improper use of equipment" of WARNING on page 2.
- Only an experienced person who is fully conversant with the equipment can do maintenance and inspection.
- Use neutral cleaner: pH value shall be 6 to 8, otherwise could cause corrosion.







CAUTION

- Never use commercial or other parts instead of ANEST IWATA original spare parts.

Step-by-step procedure	Important
1. Pour remaining paint to another container. Clean fluid passages and air cap Assy. Spray a small amount of thinner to clean fluid passages.	1. Incomplete cleaning can fail pattern shape and uniform particles. Especially clean fully and promptly two-component paint after use.
2. Clean each section with brush soaked with thinner and wipe out with waste cloth.	2. Soaking whole spray gun in solvent may cause spray gun malfunction. Also soaking air cap Assy itself for extended period may cause defective pattern. When cleaning, never scratch each hole of air cap Assy, fluid nozzle, and fluid needle Assy. Never damage the tip of fluid nozzle or must not put your hand on it.
3. Before disassembly, fully clean fluid passages. Remove fluid nozzle, using a ring spanner, box wrench or optional accessory spanner (code 93538601)	3. During disassembly, do not scratch seat section. Either first remove the fluid needle or hold the trigger back while removing the fluid nozzle, to protect the seating surface.
4. When you want to adjust fluid needle packing set, first tighten it by hand while fluid needle Assy remains inserted. Then tighten it further about 1/6 turn (60-degree) by spanner. When you remove needle packing set, do not leave plastic piece of needle packing set in the spray gun body. <div style="text-align: center;"> <p>plastic piece (white)</p> </div>	4. If you tighten fluid needle packing set too much, fluid needle Assy will not move smoothly, resulting in paint leakage from tip of fluid nozzle. Try to adjust it carefully while pulling trigger and confirming movement of fluid needle Assy. When you tighten it too much, first fully loosen it and then tighten it again carefully.
5. To assemble the air valve, first assemble the air valve, air valve spring, and fluid adj. guide Assy. together. Next, insert fluid needle into fluid adj. guide Assy., then fit it to spray gun body and screw fluid adj. guide Assy. in	5. If you try to fit air valve spring and air valve to spray gun body set without fluid needle Assy, air valve will not be fitted correctly and top packing inside fluid adj. guide Assy will be damaged.
6. Before assembling the pattern adj. Assy. or air adj. Assy. back on to the gun body, fully turn the adjustment knobs counterclockwise to open. Once in the gun body the pattern adj. knob and air adj. knob can be tightened.	6. If pattern adj. knob or air adj. knob is not fully opened when tightening into gun body, the tip of it can contact and damage the seating surface.
7. When you assemble the needle spring on the fluid needle, the plastic tip should be on the opposite side as the fluid needle tip. <div style="text-align: center;"> <p>Fluid needle</p> <p>Needle spring Assy</p> <p>Plastic tip</p> </div>	7. If plastic tip is on the wrong side, it may not operate normally. Incorrect installation of the needle spring may cause a heavy trigger pull.

Where to inspect	Parts replacement standard
1. Each hole passage of air cap Assy and fluid nozzle	Replace if it is crushed or deformed.
2. Packing and O ring	Replace if it is deformed or worn out.
3. Leakage from seat section between fluid nozzle and fluid needle Assy	Replace them if leakage does not stop after fully cleaning the fluid nozzle and needle. If you replace the fluid nozzle or fluid needle only, ensure they fully match and confirm that there is no leakage.

■ Troubleshooting

Spray Pattern	Problems	Remedies
 Fluttering	1. Air enters between fluid nozzle and tapered seat of spray gun body. 2. Air is drawn from fluid needle packing set. 3. Air enters at fluid container fitting nut or fluid hose joint.	1. Remove fluid nozzle to clean seat. If it is damaged, replace nozzle. 2. Tighten fluid needle packing. 3. Fully tighten joint section.
 Crescent	1. Paint buildup on air cap assy partially clogs horn holes. Air pressure from both horns differs.	1. Remove obstructions from horn holes with attached brush. But do not use metal objects to clean horn holes.
 Inclined	1. Paint buildup or damage on fluid nozzle circumference and air cap assy center. 2. Fluid nozzle is not properly fitted.	1. Remove obstructions. Replace if damaged. 2. Remove fluid nozzle and clean seat section.
 Split	1. Paint viscosity too low. 2. Fluid output too high.	1. Add paint to increase viscosity. 2. Turn fluid adj. knob clockwise to reduce fluid output. Or turn pattern adj. assy clockwise.
 Heavy Center	1. Paint viscosity is too high. 2. Fluid output is too low.	1. Add thinner to reduce viscosity. 2. Turn fluid adj. knob counter-clockwise to increase fluid output.
 Spit	1. Fluid nozzle and fluid needle assy are not seated properly. 2. The first-stage travel of trigger (when only air discharges) decreases. 3. Paint buildup inside air cap assy.	1. Clean or replace fluid nozzle and fluid needle assy. 2. Replace fluid nozzle and fluid needle assy. 3. Clean air cap assy.


R1: retighten R2: adjust R3: clean R4: replace parts

Problem	Where it occurred	Parts to be checked	Cause	Remedy			
				R1	R2	R3	R4
Paint leaks	Fluid nozzle	Fluid nozzle ~ Fluid needle assy	Dirt, damage, wear on seat			○	○
			Loose fluid needle adj. knob		○		
			Wear on needle spring				○
		Fluid nozzle ~ Spray gun body	Insufficient tightening	○			
	Dirt or damage on seat				○	○	
	Needle packing set	Needle packing set ~ Fluid needle assy	Fluid needle assy does not return due to packing set too tight		○		○
Fluid needle assy does not return due to paint buildup on fluid needle				○	○		
Paint does not come out	Tip of spray gun	Fluid adj. knob	Insufficient opening		○		
			Tip hole of fluid nozzle	Clogged			○
		Needle packing set ~ Fluid needle assy	Clogged			○	○
			Insufficient tightening		○		
	Air valve & Air valve seat assy	Air valve	Dirt or damage on seat			○	○
			Air valve seat assy	Dirt or damage on seat			○
		Wear on air valve spring				○	

■ How to operate

- Suggested air pressure is 1.5 to 3.5 bar (22to 50 PSI).
- Recommended paint viscosity differs according to paint property and painting conditions. 14 to 25 sec. / Ford cup#4 is recommendable.
- Keep fluid output as small as possible to the extent that the job will not be hindered. It will lead to better finishing with fine atomization.
- Set the spray distance from the spray gun to the work piece as near as possible within the range of 200~250 mm (7.9~9.8 in).
- The spray gun should be held so that it is perpendicular to the surface of the work piece at all times. Then, the spray gun should move in a straight and horizontal line. Arcing the spray gun causes uneven painting.

200—250 mm
(7.9 — 9.8 in)



ANEST IWATA Corporation

3176, Shinyoshida-cho, Kohoku-ku, Yokohama, 223-8501, Japan

Manual No. T950-01
Code No. 03014430

Residual risk

Residual Risk Map Requiring Protective Measures by Machine Users (Abbreviated Name: Residual Risk Map)

Product model: "Spray gun :WIDER1 / WIDER2"


2019/5/29 Create
ANEST IWATA Corporation

※ Be sure to read and understand the instruction manual before using the product. This document is a reference material in the instruction manual and must not be used with only an understanding of the contents of this document.

Residual risk is classified and described according to the following definitions	
DANGER	Contents that are likely to cause death or serious injury if protection measures are not implemented.
WARNING	Contents that may cause death or serious injury if protection measures are not implemented.
CAUTION	Contents that may cause minor injury if protection measures are not implemented

Symbols and numbers shown in the figure correspond to those described in the "List of Residual Risks" of the Product. Refer to the List of Residual Risks for details of each residual risk.

Residual risk that is not identified on the machine	
DANGER	—
WARNING	No.3, No.5, No.6, No.7, No.8, No.9
CAUTION	—

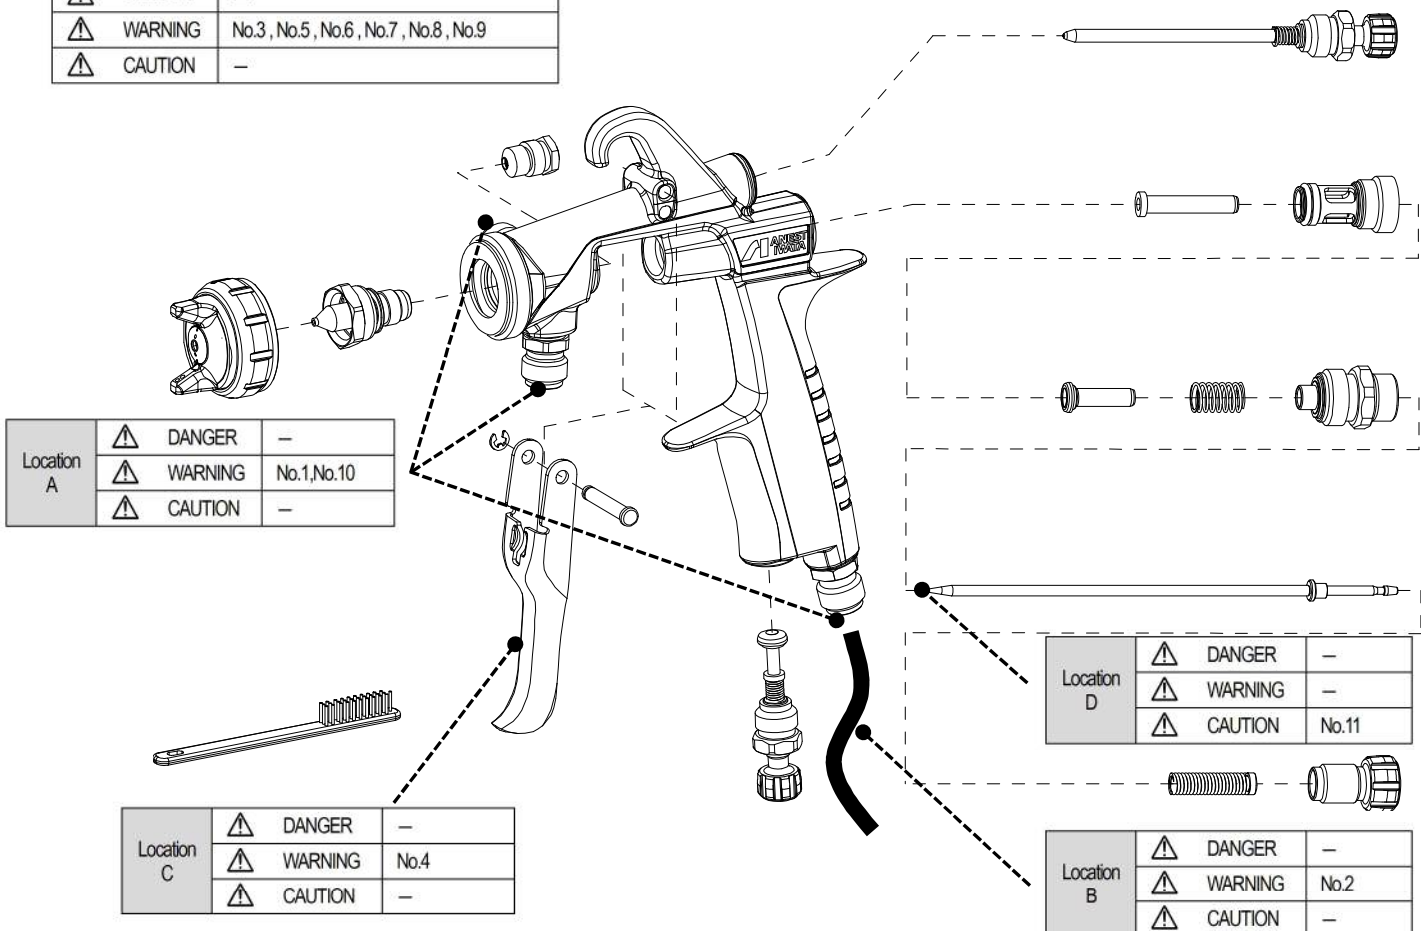




Residual risk

List of residual risks requiring protection measures by machine users (Abbreviated Name: List of Residual Risks)












Product model: " Spray gun :WIDER1 / WIDER2"

2019/5/29 Create
ANEST IWATA Corporation

※ Be sure to read and understand the instruction manual before using the product. This document is a reference material in the instruction manual and must not be used with only an understanding of the contents of this document.

※ 1 "degree of hazard" is classified and described according to the following definitions	
 DANGER	Contents that are likely to cause death or serious injury if protection measures are not implemented.
 WARNING	Contents that may cause death or serious injury if protection measures are not implemented.
 CAUTION	Contents that may cause minor injury if protection measures are not implemented

※2 The symbol shown as "Location on machinery" is the number of the machine section on the Residual Risk Map of the Product. See Residual Risk Map for specific points on the machinery.

No.	Operational Phase	Works	Qualifications and Training required for the work	Location on the machinery *2	Harm Degree *1	Type of Harm	Protective measure protective measure performed by the machinery user	Instruction Manual Referenced page
1	Use	Preparation work During work	—	A	 Warning	A wrong connection between the air joint and the paint joint may cause paint to spout from an unexpected place and hit the operator.	To provide personal protective equipment	P2
2	Use	All	—	B	 Warning	Ignition and fire caused by static electricity	Use of a hose with a ground and confirmation of ground	P2
3	Use and maintenance	During work, decomposition and rinse	—	Default	 Warning	Organic solvents, etc., may come into contact with the eyes and skin, causing irritation.	To provide personal protective equipment	P2
4	Use	During work	—	C	 Warning	Tenosynovitis due to repeated pulling of the trigger	Moderate rest	P2
5	Use	All	—	Default	 Warning	Fire, electrical appliances, etc. ignite, and fire generating.	Strict ban on the use of fire	P2
6	Use	Preparation work During work	—	Default	 Warning	Supply at specified pressure or higher, paint spouts from unexpected places, hitting human body or eyes, blindness	To provide personal protective equipment	P2
7	Use and maintenance	Preparation work During work	—	Default	 Warning	The product is modified, parts other than genuine parts are used, and an unexpected failure or accident generating.	No modification Use of genuine parts	P2
8	Use	Preparation work During work	—	Default	 Warning	The patient stayed in a location where noise such as blowing air was generated for a long time, resulting in hearing loss.	Use of earplugs is recommended.	P2
9	Use and maintenance	During work, decomposition and rinse	—	Default	 Warning	Organic solvent poisoning Due to inhale of solvent and paint mist	To provide personal protective equipment Work in painting booths, etc.	P2
10	Use and maintenance	Preparation work During work	—	A	 Warning	If the hoses are tried to be disconnected under pressurized condition, paint, cleaning liquid, air, etc. are spouted out and injured.	To provide personal protective equipment Remove residual pressure	P2
11	Maintenance	Preparation work	—	D	 Caution	Needle valve piercing with sharp corners	To provide personal protective equipment	P2

No.R003-00
Code No.03014490